


**Model F-609-W Vertical Indicator Post**

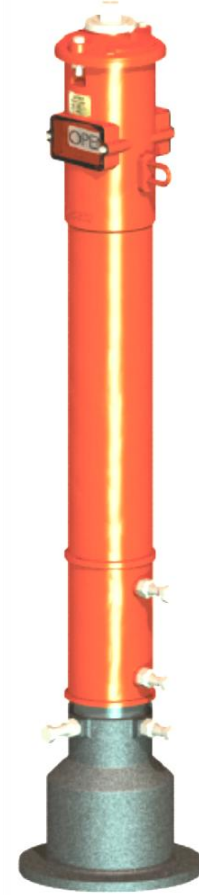

**MATERIAL LIST**

PART	SPECIFICATION
1.Hex Cap Screw	Carbon Steel ASTM A307B
2.Hex Nut Wedge	Carbon Steel ASTM A307B
3.Crane Coupling	Ductile Iron ASTM A536 Gr. 65-45-12
4.Cotter Pin	Stainless Steel AISI 302
5.Base Flange	Cast Iron ASTM A126 Class B
6.Hex Nut	Carbon Steel ASTM A307B
7.Hex Cap Screw	Carbon Steel ASTM A307B
8.Standpipe	Carbon Steel ASTM A53
9.Stem 1" Square	Carbon Steel AISI 1045
10.Body	Cast Iron ASTM A126 Class B
11.Locking Wrench	Ductile Iron ASTM A536 Gr. 65-45-12
12.Target Carrier Nut	Bronze ASTM B62 or Stainless Steel AISI 304
13.Hex Cap Screw	Carbon Steel ASTM A307B
14.Hex Nut	Carbon Steel ASTM A307B
15.Hex Cap Screw	Carbon Steel ASTM A307B
16.Target	Cast Aluminum
17.Window Glass	Plexi glass
18.Gasket	PTFE
19. Operating Nut	Bronze ASTM B62 or Stainless Steel AISI 304
20.Top Section	Cast Iron ASTM A126 Class B
21.Snap Ring	Stainless Steel AISI 1066
22.Plug	Malleable Iron
23.Square Nut	Carbon Steel ASTM A307B
24.Hex Cap Screw	Carbon Steel ASTM A307B

**Field Adjustment:**

1. Remove the top section from the top of the Indicator Post assembly.
2. Cut the required stem length and adjust the Standpipe to match up the ground line.
3. Set the "OPEN" and "SHUT" targets for the appropriate valve size.
4. Reattach the top section to the top of the Indicator Post assembly.

